


249.00 EUR  
incl. 19% VAT, plus [shipping](#)

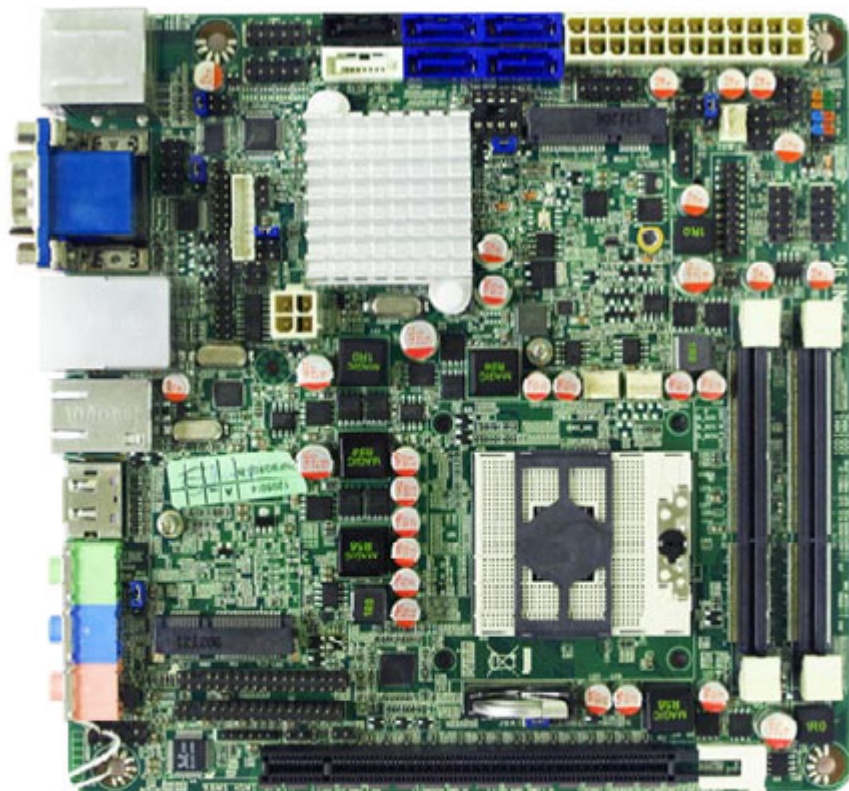

Support:  [Specifications](#)

- Intel® QM77 Express Chipset
- Supports Intel Core™ i3, i5, i7 Mobile Processors for Socket G (rPGA988)
- 2 \* Dual Channel DDR3-1333/1066 up to 16GB
- Intel 82579LM & 82574L Gigabit LAN
- Intel Active Management Technology ( iAMT 8.0)
- PCI Express x16 Slot
- Integrated 24-bit Dual Channel LVDS
- 4-port SATAII 3Gb/s & 2-port SATA III 6Gb/s with RAID 0, 1, 5, 10 Support
- HDMI, DP and VGA Video Outputs
- Support Jetway PCI-E Daughter card
- Built-in Watchdog Timer Technology
- Mini-ITX Form Factor (170mm x 170mm)

|                        |                                                                                                                                                     |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>             | Supports Intel Core™ i3, i5, i7 Mobile Processors for Socket G (rPGA988)                                                                            |
| <b>Chipset</b>         | INTEL® QM77 Chipset                                                                                                                                 |
| <b>Memory</b>          | 2 * SODIMM Sockets for un-buffered Dual CH DDR3 1333/1066 Max. up to 16GB                                                                           |
| <b>Expansion Slots</b> | 1 *PCIe x 16<br>2 * Mini PCI-E socket                                                                                                               |
| <b>Storage</b>         | 2 * Serial ATA3 6Gb/s & 4 * Serial ATA2 3Gb/s connectors support RAID 0, 1, 5, 10<br>1 * mSATA socket (Selectable with full size Mini PCI-E socket) |
| <b>Audio</b>           | Realtek ALC662 6-Channel HD Audio CODEC                                                                                                             |
| <b>Ethernet LAN</b>    | Intel 82579LM & 82574L PCI-E Gigabit Ethernet LAN                                                                                                   |

|                           |                                                                                                                                                                                                                                                                                                                |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • <b>LVDS</b>             | Onboard 24-bit dual channel LVDS connector                                                                                                                                                                                                                                                                     |
| • <b>USB</b>              | Embedded 6 * USB 2.0/1.1 & 4 * USB 3.0                                                                                                                                                                                                                                                                         |
| • <b>Special Features</b> | Support ACPI S3<br>Support CPU Smart FAN<br>Support Watch Dog                                                                                                                                                                                                                                                  |
| • <b>Rear Panel I/O</b>   | 2 * USB 2.0/1.1 ports & 2 * USB 3.0 ports<br>2 * RJ-45 port<br>1 * HDMI port<br>1 * COM port<br>1 * DP port<br>1 * VGA port<br>3 * Audio Phone Jack                                                                                                                                                            |
| • <b>Internal I/O</b>     | 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports<br>1 * USB 3.0 headers for 2 USB 3.0 ports<br>CPU /NB / Chassis Fan connectors<br>3 * COM headers (COM4 for RS232/422/485)<br>1 * GPIO header<br>1 * CIR header<br>1 * Chassis Intrusion header<br>1 * AUDIO header<br>1 * 24-pin & 4-pin 12V ATX Power connectors |
| • <b>BIOS</b>             | AMI EFI 64MB SMT Flash ROM                                                                                                                                                                                                                                                                                     |
| • <b>Form Factor</b>      | Mini-ITX Form Factor (170mm x 170mm)                                                                                                                                                                                                                                                                           |
| • <b>Functional</b>       | ATM, Automation, Medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation, NAS                                                                                                                                                                                        |
| • <b>Certificate</b>      | CE, FCC, RoHS                                                                                                                                                                                                                                                                                                  |
| • <b>Temperature</b>      | Operating within 0~60 centigrade<br>Storage within -20-85 centigrade                                                                                                                                                                                                                                           |