


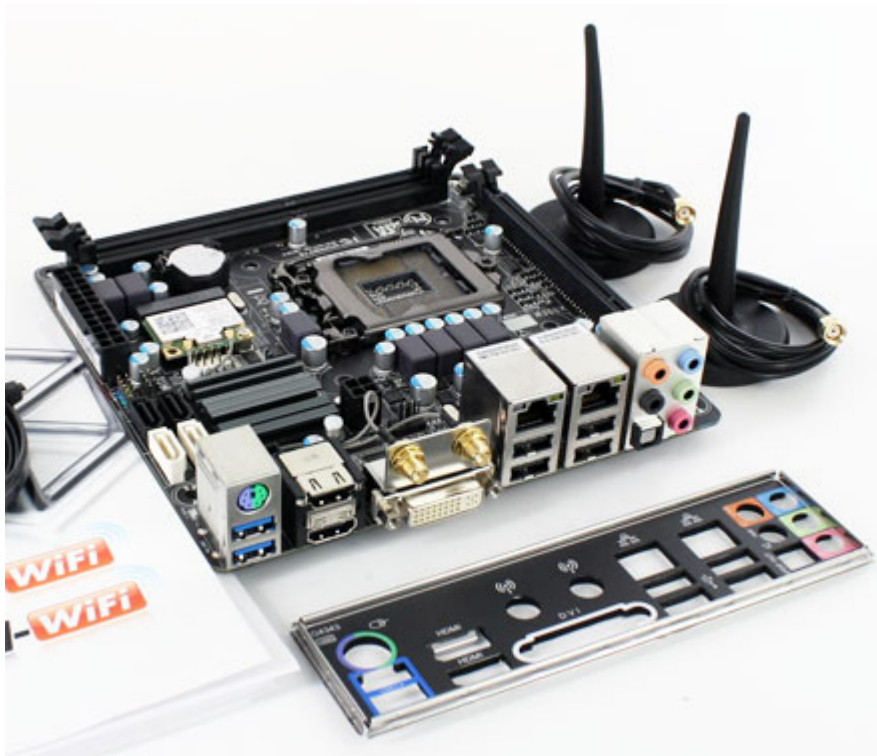

109.95 EUR

incl. 19% VAT, plus [shipping](#)

- Intel WiFi, Intel WiDi !
- Dual Gigabit LAN !
- Gigabyte Features !
- Intel Ivy/Sandy Bridge !

Features :

- Intel H77
- RAM: 2x DDR3
- Expansion: 1x PCIe 3.0 x16
- External : 1x DVI-I, 2x HDMI, 2x USB 3.0, 4x USB 2.0, 2x Gb LAN (Realtek), 7.1 Audio (ALC892), 1x PS/2 Combo
- Internal: 2x USB 3.0, 2x USB 2.0, 2x SATA 6Gb/s, 2x SATA II, 1x CPU-Lüfter PWM, 1x Lüfter PWM, 1x serial
- Notes: Mini-ITX, UEFI, All Solid Capacitors, WLAN 802.11b/g/n, Bluetooth 4.0

1. Support for Intel® Core™ i7 processors/Intel® Core™ i5 processors/Intel® Core™ i3 processors/Intel® Pentium® processors/Intel® Celeron® processors in the LGA1155 package

CPU

2. L3 cache varies with CPU

(Some Intel® Core™ processors require a graphic card, please refer "CPU support List" for more information.)

Chipset

1. Intel® H77 Express Chipset

Memory	1. 2 x 1.5V DDR3 DIMM sockets supporting up to 16 GB of system memory * Due to a Windows 32-bit operating system limitation, when more than 4 GB of physical memory is installed, the actual memory size displayed will be less than the size of the physical memory installed.
	2. Dual channel memory architecture
	3. Support for DDR3 1600/1333/1066/800 MHz memory modules * To support DDR3 1600 MHz, you must install an Intel 22nm (Ivy Bridge) CPU.
	4. Support for non-ECC memory modules
	5. Support for Extreme Memory Profile (XMP) memory modules (Please refer "Memory Support List" for more information.)
Onboard Graphics	Integrated Graphics Processor:
	1. 1 x DVI-I port, supporting a maximum resolution of 1920x1200 2. 2 x HDMI ports, supporting a maximum resolution of 1920x1200
Audio	1. Realtek ALC892 codec
	2. High Definition Audio
	3. 2/4/5.1/7.1-channel
	4. Support for S/PDIF Out
LAN	1. 2 x Realtek GbE LAN chip (10/100/1000 Mbit)
Wireless Communication module	1. Wi-Fi 802.11 b/g/n, Supports Intel Wireless Display (WiDi)
	2. Bluetooth 4.0, 3.0+HS, 2.1+EDR
Expansion Slots	1. 1 x PCI Express x16 slot, running at x16 (The PCIEX16 slot conforms to PCI Express 3.0 standard.) * Whether PCI Express 3.0 is supported depends on CPU and graphics card compatibility.

Chipset:**Storage
Interface**

1. 2 x SATA 6Gb/s connectors (SATA3 0/1) supporting up to 2 SATA 6Gb/s devices
2. 2 x SATA 3Gb/s connectors (SATA2 2/3) supporting up to 2 SATA 3Gb/s devices
3. Support for RAID 0, RAID 1, RAID 5, and RAID 10
* When a RAID set is built across the SATA 6Gb/s and SATA 3Gb/s channels, the system performance of the RAID set may vary depending on the devices being connected.

Chipset:**USB**

1. Up to 4 USB 3.0/2.0 ports (2 ports on the back panel, 2 ports available through the internal USB header)
2. Up to 6 USB 2.0/1.1 ports (4 ports on the back panel, 2 ports available through the internal USB header)

**Internal I/O
Connectors**

1. 1 x 24-pin ATX main power connector
2. 1 x 4-pin ATX 12V power connector
3. 1 x serial port header
4. 2 x SATA 6Gb/s connectors
5. 2 x SATA 3Gb/s connectors
6. 1 x USB 3.0/2.0 header
7. 2 x USB 2.0/1.1 headers
8. 1 x CPU fan header
9. 1 x system fan header
10. 1 x front panel header
11. 1 x front panel audio header
12. 1 x S/PDIF Out header
13. 1 x Clear CMOS jumper

Back Panel Connectors	1. 1 x PS/2 keyboard/mouse port
	2. 2 x HDMI ports
	3. 2 x antenna connectors
	4. 1 x DVI-I port
	5. 2 x USB 3.0/2.0 ports
	6. 4 x USB 2.0/1.1 ports
	7. 2 x RJ-45 ports
	8. 1 x optical S/PDIF Out connector
	9. 5 x audio jacks (Center/Subwoofer Speaker Out, Rear Speaker Out, Line In, Line Out, Mic In)
I/O Controller	1. iTE I/O Controller Chip
H/W Monitoring	1. System voltage detection
	2. CPU/System temperature detection
	3. CPU/System fan speed detection
	4. CPU fan speed control
* Whether the CPU fan speed control function is supported will depend on the CPU cooler you install.	
BIOS	1. 2 x 64 Mbit flash
	2. Use of licensed AMI EFI BIOS
	3. Support for DualBIOS™
	4. PnP 1.0a, DMI 2.0, SM BIOS 2.6, ACPI 2.0a

	- Support for @BIOS - Support for Q-Flash - Support for Xpress Install - Support for EasyTune * Available functions in EasyTune may differ by motherboard model. - Support for eXtreme Hard Drive (X.H.D)
Unique Features	- Support for Auto Green - Support for ON/OFF Charge - Support for Q-Share - Support for EZ Setup - Support for Intel Wireless Display (Intel WiDi) - Exclusive Bluetooth 4.0/WiFi module
Bundle Software	- Norton Internet Security (OEM version) - Intel® Rapid Start Technology - Intel® Smart Connect Technology - Intel® Smart Response Technology
Operating System	Support for Microsoft® Windows 8/7/XP
Form Factor	Mini-ITX Form Factor; 17.0cm x 17.0cm
Remark	- Due to different Linux support condition provided by chipset vendors, please download Linux driver from chipset vendors' website or 3rd party website. - Most hardware/software vendors may no longer offer drivers to support Win9X/ME/2000/XP SP1/SP2. If drivers are available from the vendors, we will update them on the GIGABYTE website.