


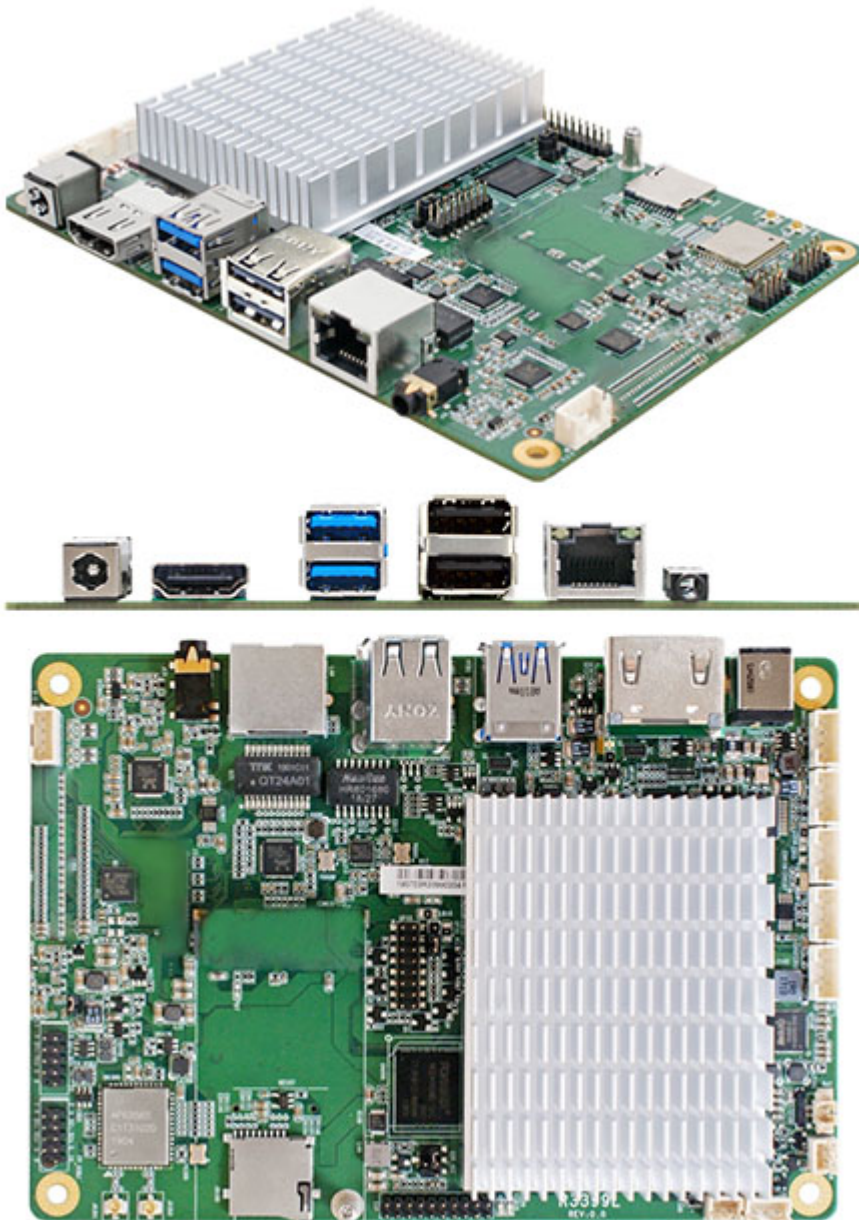

259.00 EUR  
incl. 19% VAT, plus [shipping](#)

- 16G Flash ROM !
- 2GB DDR3L !
- 6 core CPU !

- Rockchip® ARM Cortex A72 (Dual Core) + Cortex A53 (Quad Core) RK3399 6 core 2.0GHz
- On board 1333/2GB DDR3L DRAM, On board 16G Flash ROM (Max. 64GB)
- Support WIFI and Blue Tooth
- 1\* Realtek GbE, 3\* UART, 1\* RS232, 2\* USB3.0 ■ 6\* USB2.0, 1\* OTG (Co-lay USB3.0), 1\* HDMI2.0, 1\* eDP
- Support 4K H.264/H.265 video decoding, up to 60fp 10bits coding
- Support 1080P H.264 format video encoding
- 1\* Micro SD Max 256GB
- Support Android 7.1, Debian9.0

| Model            |               |
|------------------|---------------|
| Model            | – JR3399XL-2C |
| Part Number      | – JR3399XL-2C |
| Form Factor      |               |
| Dimensions       | – 102 * 146mm |
| Processor System |               |

|                       |                                                                                                                                                                                                                                                                                                   |
|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Processor/CPU         | <ul style="list-style-type: none"> <li>– Rockchip® ARM Cortex A72 (Dual Core) + Cortex A53 (Quad Core) 2.0GHz</li> <li>– Rockchip® RK808-D PMU</li> </ul>                                                                                                                                         |
| <b>Memory</b>         |                                                                                                                                                                                                                                                                                                   |
| DRAM                  | – Onboard DDR3L 1333MHz 2GB                                                                                                                                                                                                                                                                       |
| <b>Expansion Slot</b> |                                                                                                                                                                                                                                                                                                   |
| Dimensions            | <ul style="list-style-type: none"> <li>– 1* Micro SD</li> <li>– 1* SIM Card Socket</li> </ul>                                                                                                                                                                                                     |
| <b>Graphics</b>       |                                                                                                                                                                                                                                                                                                   |
| Graphics              | <ul style="list-style-type: none"> <li>– Mali T860MP4 GPU, OpenGL ES1.1/2.0/3.0, OpenCL1.2, DirectX11.1</li> <li>– 1* HDMI (Max Resolution: 3840×2160@60Hz)</li> <li>– 1* eDP (Max Resolution: 4096×2304@60Hz)</li> <li>– Support Dual Displays</li> </ul>                                        |
| <b>Ethernet</b>       |                                                                                                                                                                                                                                                                                                   |
| Ethernet              | – 1* Realtek RTL8211E GbE                                                                                                                                                                                                                                                                         |
| Wifi                  | – 1* AMPAK AP6356S 802.11 a/b/g/n/ac 2.4/5G WIFI and BT-V4.1                                                                                                                                                                                                                                      |
| <b>Audio</b>          |                                                                                                                                                                                                                                                                                                   |
| Audio                 | – 2 channel HD audio: ALC5640                                                                                                                                                                                                                                                                     |
| <b>Storage</b>        |                                                                                                                                                                                                                                                                                                   |
| Storage               | – 16GB Flash ROM (Max 64GB)                                                                                                                                                                                                                                                                       |
| <b>I/O Port</b>       |                                                                                                                                                                                                                                                                                                   |
| Rear I/O              | <ul style="list-style-type: none"> <li>– 1* DC Jack (12V)</li> <li>– 2* USB3.0 (Co-lay OTG)</li> <li>– 2* USB2.0</li> <li>– 1* HDMI2.0</li> <li>– 1* AUDIO(Line-out +MIC)</li> <li>– 1* RJ45</li> </ul>                                                                                           |
| Internal I/O          | <ul style="list-style-type: none"> <li>– 4* USB2.0</li> <li>– 3* UART, 1* RS232, 1* Debug</li> <li>– 1* eDP</li> <li>– 1* Speaker (3W AMP)</li> <li>– 1* GPIO (8 bit)</li> <li>– 1* I2C</li> <li>– 1* Power BT (Header)</li> <li>– 1* Reset BT (Header)</li> <li>– 1* CPU FAN (Header)</li> </ul> |
| <b>Watchdog Timer</b> |                                                                                                                                                                                                                                                                                                   |
| Watchdog Timer        | <ul style="list-style-type: none"> <li>– From Super I/O to drag RESETCON#</li> <li>– 256 segments(0~255 sec)</li> </ul>                                                                                                                                                                           |
| <b>Power</b>          |                                                                                                                                                                                                                                                                                                   |
| Power                 | 12V DC-in (PWR Con)<br><ul style="list-style-type: none"> <li>– AT : Directly PWR on as Power input ready</li> <li>– ATX: Press Button to PWR on after Power input ready</li> </ul>                                                                                                               |
| <b>Compliance</b>     |                                                                                                                                                                                                                                                                                                   |
| Certifications        | – CE, FCC, LVD, RoHS, REACH                                                                                                                                                                                                                                                                       |
| <b>Environment</b>    |                                                                                                                                                                                                                                                                                                   |
| Temperature           | <ul style="list-style-type: none"> <li>– Operating: -10°C ~ 60°C</li> <li>– Storage: -20°C ~ 70°C</li> </ul>                                                                                                                                                                                      |